



## FF-T

### FF-T 2.5kN and 10kN

FF-T bend fixtures are applicable for determining stiffness and flexural properties of rigid and semi-rigid materials.

Fixtures available in both three and four-point loading in a variety of force capacities and spans





FF-2.5T-3 pt with hardened supports



FF-2.5T-4 pt with interchangeable rollers

| Item number          | FF-2.5T                                       | FF-10T                                        |
|----------------------|-----------------------------------------------|-----------------------------------------------|
| Maximum Capacity     | 2.5 kN                                        | 10 kN                                         |
| Maximum Span*        | Length: 150 mm<br>Width: 30 mm                | Length: 150 or 300 mm<br>Width: 30 mm         |
| Upper Support Radius | 1, 1.5, 2, 3.2, or 5 mm                       | 1, 1.5, 2, 3.2, or 5 mm                       |
| Lower Support Radius | 1.5mm & 2.5mm<br>2mm & 3mm<br>3.2mm & 5mm     | 1.5mm & 2.5mm<br>2mm & 3mm<br>3.2mm & 5mm     |
| Support Options      | Hardened<br>Interchangeable rollers<br>Milled | Hardened<br>Interchangeable rollers<br>Milled |
| Temperature range    | 0 – 180 °C                                    | 0 – 350 °C                                    |
| Material/Finish      | Aluminum                                      | Steel                                         |
| Connection Size      | 15.9 mm (5/8 in) Female eye end               | 15.9 mm (5/8 in) Female eye end               |

\*Other span lengths available upon request

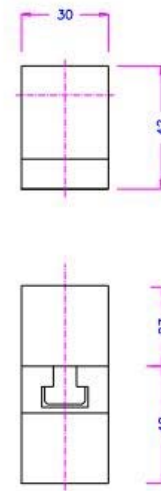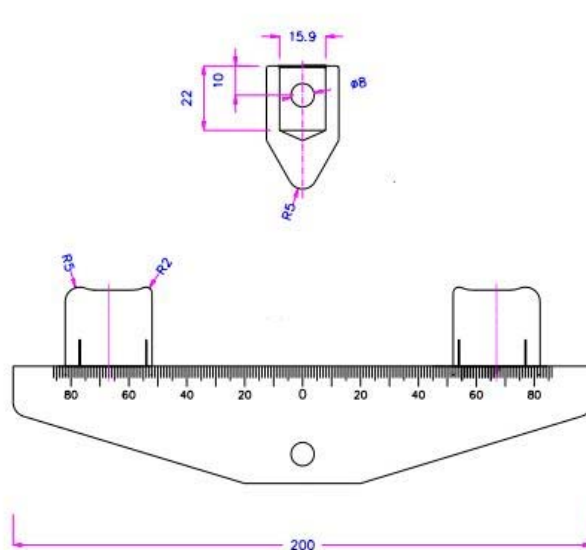

FF-2.5T with 5mm and 2mm radii hardened supports