



GP-1AT+Ko

GP-1AT +Ko – Pneumatic grip

Pneumatic piston 50mm Ø
manually adjustable counter-jaw
Weight: 0.53 kg per grip

GP-1AT +2Ko Pneumatic grip

Two-sided pneumatic pistons 50mm Ø
Weight: 0.71 kg per grip

- Clamping force: 1.2 kN / 7bar
- Temperature range: 0°C - +70°C (depending on jaws)
Additional temperature ranges available on request
- Body: Aluminum, anodized
- Pneumatic connection: M5

Also available as vise grip: [GV-1AT](#)

Ordering information

Item No. GP-1AT+Ko
Item No. GP-1AT+2Ko



GP-1AT+ko




GP-1AT+2Ko

Jaws for GP-1AT+Ko and GP-1AT+2Ko: Scope of delivery 1 set = 4 jaws

Item No.	Surface	Clamping surface H x W	Opening	Weight per pair
GP-1AT-B	Blank jaws	30 x 30mm	0 – 10 mm	0.13 kg
GP-1AT-BG	Rubber jaws	30 x 30mm	0 – 8 mm	0.13 kg
GP-1AT-BP	Pyramid jaws	30 x 30mm	0 – 10 mm	0.12 kg
GP-1AT-BV2	V-jaws	30 x 30mm	2 – 10 mm Ø	0.13 kg
GP-1AT-BV3	V-jaws	30 x 30mm	3 – 10 mm Ø	0.13 kg
GP-1AT-BW	Wave jaws	30 x 30mm	0 – 10 mm	0.12 kg
GP-1AT-BD	Diamond jaws	30 x 30mm	0 – 10 mm	0.13 kg
GP-1AT-BLC	Line contact jaws*	30 x 30mm	0 – 6 mm	0.13 kg

* Scope of delivery GP-1AT-BLC: 1 set = 2xGP-1AT-BG + 2xGP-1AT-BLC jaws

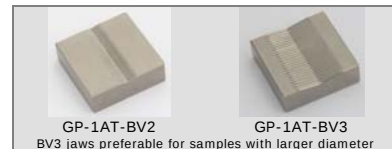

GP-1AT-BV2

GP-1AT-BV3


BV3 jaws preferable for samples with larger diameter

Inset jaws for GP-1AT+Ko and GP-1AT+2Ko: Scope of delivery 1 set = 4 jaws

Quick change system. Inset jaws require carriers (GP-1AT-GT)


Item No.	Surface	Clamping surface H x W	Opening	Weight per pair
GP-1AT-GT	Carrier	-	-	0.12 kg
GP-1AT-EB	Blank inset jaws	30 x 36mm	0-4mm	0.06 kg
GP-1AT-EBG	Rubber inset jaws	30 x 36mm	0-2mm	0.06 kg
GP-1AT-EBP	Pyramid inset jaws	30 x 36mm	0-4mm	0.05 kg
GP-1AT-EBD	Diamond inset jaws	30 x 36mm	0-4mm	0.06 kg

Jaws with other dimensions and surface coatings on request

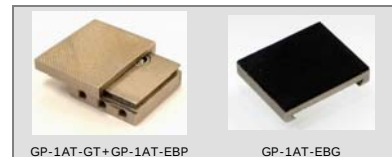


GP-1AT-GT+GP-1AT-EBP

GP-1AT-EBG

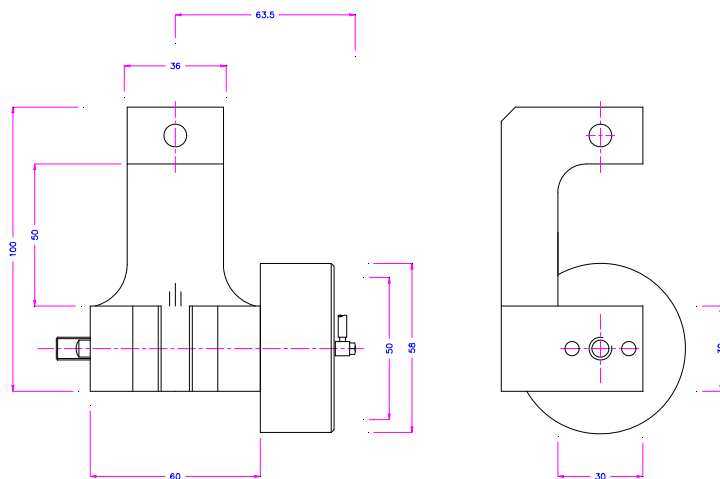

GP-1AT+Ko



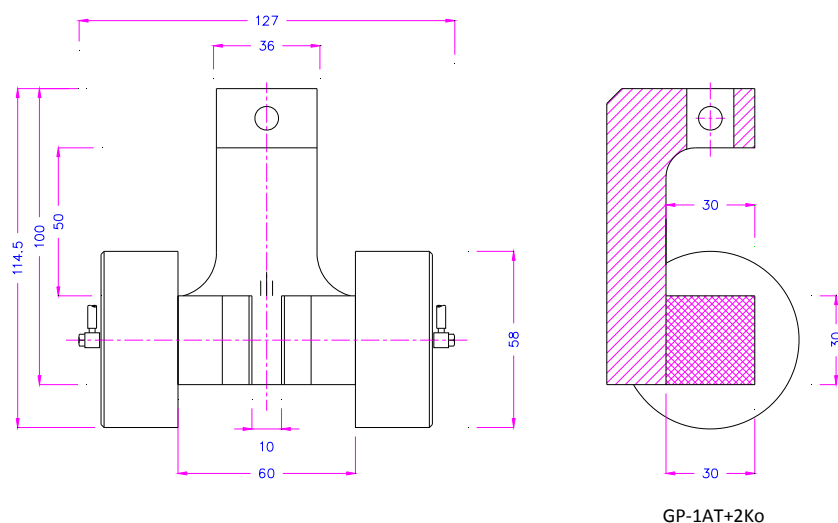

Examples for special designed jaw faces




GP-1AT-BG20x20



GP-1AT-BP0.5x45
Small pyramid serrated



GP-1AT-BP20x30



GP-1AT-BTe
Teflon coating

Accessories:



GP-1 Non-Locking Foot Switches

2 pneumatic foot switches, tubes and fittings

Non-locking: The jaws of the grip open by pressing the foot pedal and close after removing the foot from the pedal.

Scope of delivery: 1 pair of foot switches including tubes and fittings




GP-2 Locking Foot Switches

2 pneumatic foot switches, tubes and fittings,

With locking function: The jaws of the grip open by pressing the foot pedal and remain opened after removing the foot from the pedal. The jaws close by pressing the pedal one more time.

Scope of delivery: 1 pair of foot switches including tubes and fittings



GP-PR

Optional for GP-1 or GP-2

Pressure regulator

To adjust air pressure: 1-10 bar



GP-3 Locking Hand Switches

1 unit of pneumatic hand switches, tubes and fittings

With locking function: Handle with 2 positions. The jaws of the grip close by pulling the handle and remain closed. The jaws open by pushing the handle back.

Scope of delivery: 1 unit of hand switches including tubes and fittings



GP-CR

Silent compressor appropriate for laboratories

Max pressure: 16 bar; noise level: 45dB(A)

Motor 400 Watt; displacement 25 l/min

With pressure reducer/water trap

Dimensions: 280x190x240 mm (L x W x H); weight ~ 14 kg