



GW-5T


Wedge grip 5 kN

Applicable for smaller samples.

Ordering information

GW-5T grips are supplied as a pair, but can also be ordered separately.
Grips and jaws need to be ordered separately.

Item No.	GW-5T
• Tensile force	5 kN
• Body	Steel
• Temperature range	0°C up to +130°C -70°C up to +280°C (GW-5T-T-70+280°C)
• Weight	1.36 kg (without jaws)
• Scope of delivery	1 pair (without jaws)

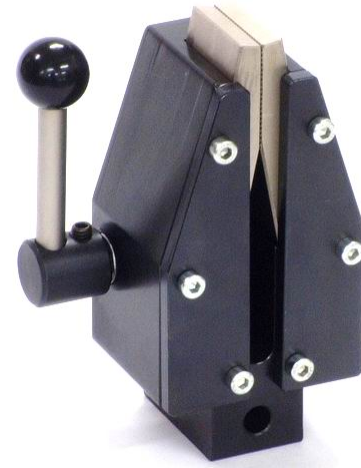

Jaws for GW-5T: Scope of delivery 1 set = 4 jaws

Item No.	Surface	Clamping surface H x W	Opening	Weight	Picture	Description
GW-5T-BP	Pyramid jaws (serrated)	30x30 mm	0 – 8 mm	0.43 kg		Multipurpose application range Pyramids (serrated) 1x45°, hardened steel 58HRC
GW-5T-BV	V-jaws	Clamping height 30 mm	3 – 8 mm Ø	0.42 kg		For all kinds of round samples Tooth pitch 1.2 mm, hardened steel 58HRC


* Further jaw types available upon request.



GW-5T-BP
Pyramid jaws



GW-5T-BV
For round samples with min
3mm thickness



GW-5T-BG
Rubber jaws



GW-5T-BD
Diamond jaws

